कायालय - अमरावता महानगरपाालका अमरावता विभागाचे नांव - प्रकाश विभाग दर सूचना (कोटेशन नोटीस)

अमनपा/प्रवि/शअ/200 /2024

दिनांक:-29/02/2024

अमरावती महानगरपालिके अंतर्गत दर सूची बाह्य दर निश्चित करण्यासाठी खालील बाबींकरीता मान्यता प्राप्त उत्पादक किंवा वितरक यांचेकडून दराबाबत दरपत्रक (कोटेशन) मोहोरबंद लिफाफ्यामध्ये अथवा ई- मेलद्वारे

| | ण्यात येत आ | | TY | |
|------|-------------|--|----------|---------|
| | | AMRAVATI MUNICIPAL CORPORATION, AMRAVA | <u> </u> | |
| Nam | e of Work | Electrical Department | | |
| | | Providing street lights on pole with decorative bracket on various | roads at | Amravat |
| Item | Category | Non- CSR Item List | | · |
| No | | Description | Unit | Rate |
| 1 | NCSR | Supplying Decorative Double arm bracket min.1.5 mtr at each side as per attached photographs made of cast iron with nut bolts arrangement for mounting on Octagonal / Decorative pole Top.Similar to Dwarka make. | Each | |
| 2 | NCSR | Supply of Decorative Single arm bracket min.1.5 mtr length as per above attached photographs made of cast iron with nut bolts arrangement for mounting on Octagonal / Decorative pole Top. Similar to Dwarka make | Each | |
| 3 | NCSR | Supply of heritage architectural Ornamental Street light pole having provision to fix decorative double arm bracket with aluminum light fixture provided foundation bolts of suitable size to grout it into specially designed RCC foundation, as shown in the enclosed drawing. The Architectural tubular design offers artistic. Inventive style & solid proven integrity, giving in touch of timelessness. Its stylistics consideration to the more practical aspects of durability, reinforcing the character of public space and after you the consummate blend of beauty and business. The decorative bracket & light shall be fixed on the top of the pole. The details of pole, brackets & light similar to Dwarka make DSP-JKT-80-01-C are given below:- | Each | |
| | | The Pole: The pole shall look like as shown in the drawing. It shall have all similar features as shown in the enclosed drawing. The Combo Conical Pole of nearly 8000mm length & approximate weight 130Kg. The pole has aluminum ornamental base (Approx. overall dimension-height 490mm, bottom dia 440mm) shall have provision of inbuilt junction box for fixing MCB's or cutouts with detachable window cover The pole has heavy duty mild steel base plate ofsize-250 X 250 X 16mm. The part above ground level aluminum casted ornamental base of commercial grade equivalent to LM6 grade material; best suitable for outdoor material as specified in drawing. The Hot Dipped Conical Pole of nearly 8000mm length start from bottom of pole with cast aluminum | | |

| | | decorative collar/rings for better look. The conical tapered shaped pipe of ISI standards IS:1239 (Part-I) 1990 with 3mm thickness start from bottom of pole with aluminum casted decorative elements in reducer/collers /rings for better look on equal intersection of pole. The design of the cast aluminum part is clearly shown in the drawing. Mentioned dimensions arc proposed dimensions which may vary with actual measurements (Tolerance of ±5%) Finish: Color specification & finishing process must follow as per the ISI standard All parts must be clean by SHOT blasting process. Further parts are painted in 4 layer coating (Coating thickness-125 to 150 micron) in which first layer with epoxy primer (to prevent corrosion), second layer with epoxy base colour, than third layer polyurethane (PU) metallic paint (Gold/Green/Copper/Silver) & final layer of polyurethane(PU) lacquer (to prevent ultra violets ray) Material Specification: All this above parts in cast aluminum castings must be made of equivalent to LM6 grade materials best suitable for this type of outdoor material. The overall wall thickness Must be 10 to 12mm this composition is best Suitable for product | | 3 4 |
|-----|------|---|------|------------|
| 4 | NCSR | strength & life. | Each | |
| | | | | |
| - , | | Light Fixture: -Supply of 120W LED suspension type decorative street light fitting made of spun alluminium housing, polycarbonate diffuser protector with IP65 protection for optical compartment, with high power LED's CCT 5700k. The luminaire shall have inbuilt IP65 driver, Voltage range 170-280V, power factor > 0.95, efficiency should be 90 lumens/watt, THD should be less than 10, CRI should be more than 85 & above 4KV surge protection. Similar to Bajaj Make 120W LED BORAGE MODEL. | | |


| दरपत्रक सादर करण्याचा कालावधी | दि.29 /02/2024 ते दि. 🗳 03/2024 | | |
|-------------------------------|------------------------------------|--|--|
| | सायंकाळी 5.00 वाजेपर्यंत | | |
| दरपत्रक सादर करण्याचे ठिकाण | प्रकाश विभाग, महानगरपालिका अमरावती | | |
| ई-मेल आयडी | ee1pwdamc@gmail.com | | |
| दूरध्वनी क्रमांक | 0721-2576482 | | |


टिप:- 1) दर वस्तु व सेवा कर विरहीत (Exclusive G.S.T) देण्यात यावे.

2) दरपत्रक सादर करण्याकरीता मान्यताप्राप्त उत्पादक किंवा वितरक असल्याबाबतचे प्रमाणपत्र जोडणे आवश्यक आहे.

3) दरपत्रक सादर करण्याचा कालावधी नंतर प्राप्त झालेले दरपत्रक ग्राह्य धरण्यात येणार नाही.

शहर अभियंता प्रहानगरपालिका, अमरावती

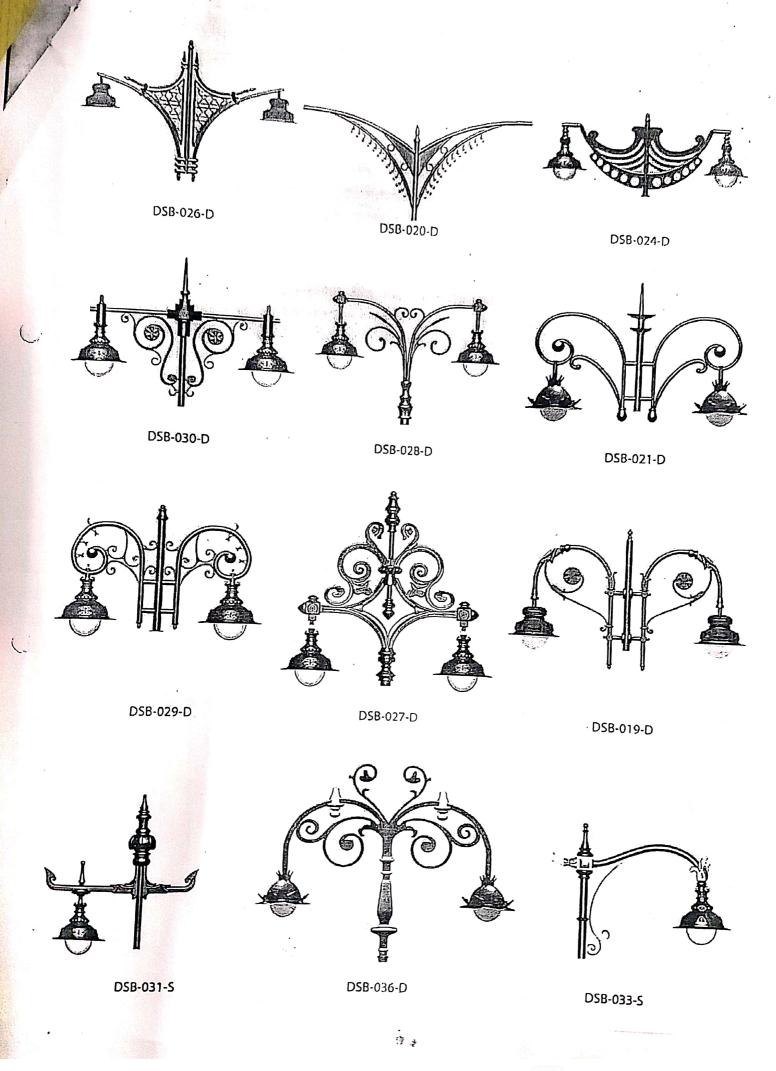

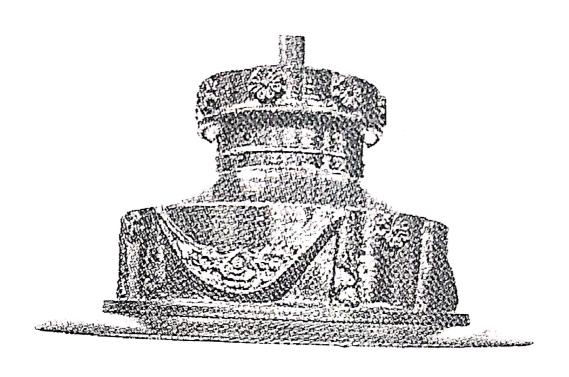

DGL-101-S - 45 cm DGL-101-M - 53 cm DGL-101-L - 63 cm